

# Information & Communication Security (SS 2022)

## Computer System Security

Prof. Dr. Kai Rannenberg

Chair of Mobile Business & Multilateral Security  
Goethe-University Frankfurt a. M.

- Introduction
- Security Threats
- Operating System Security
- Mobile Malware
- Improving Security



2008 landmark judgement by German Bundesverfassungsgericht (BVerfG):

Basic right to confidentiality and integrity of IT systems

“1. Das allgemeine Persönlichkeitsrecht (Art. 2 Abs. 1 i.V.m. Art. 1 Abs. 1 GG) umfasst das Grundrecht auf Gewährleistung der Vertraulichkeit und Integrität informationstechnischer Systeme.“

Stealthy infiltration of IT systems is problematic:

„2. Die heimliche Infiltration eines informationstechnischen Systems, mittels derer die Nutzung des Systems überwacht und seine Speichermedien ausgelesen werden können, ist verfassungsrechtlich nur zulässig, wenn tatsächliche Anhaltspunkte einer konkreten Gefahr für ein überragend wichtiges Rechtsgut bestehen. (...)”

- Introduction
- Security Threats
  - Malicious Logic
  - Buffer Overflow
- Operating System Security
- Mobile Malware
- Improving Security

- Introduction
- Security Threats
  - Malicious Logic
  - Buffer Overflow
- Operating System Security
- Mobile Malware
- Improving Security

## Definitions

- Is a set of instructions that cause a site's security policy to be violated.

*[M. Bishop, Introduction to Computer Security]*

- A program implemented in hardware, firmware, or software, and whose purpose is to perform some unauthorized or harmful action.

*[ISO/IEC 2382-8]*

- Hardware, software, or firmware capable of performing an unauthorized function on an information system.

*[National Information Systems Security (INFOSEC) Glossary 2000]*

Malicious logic is also known as malicious code or **malware** (Malicious software).

- Trojan Horses
  - Programs with a covert purpose, non-spreading
- Viruses
  - Self-spreading program - it replicate relying on user activity
- Worms
  - Propagate autonomously from system to system
- Logic Bombs
  - Hidden code, triggered by external event




- Program with an *overt* purpose (known to user) and a *covert* purpose (unknown to user)
  - Often called a Trojan
  - Named by Dan Edwards in Anderson Report [Anderson72]
- Example 1: NetBus
  - Designed originally as remote maintenance tool for early Windows systems
  - Victim downloads and installs it:
    - Usually disguised as a game program, or integrated within one
  - Acts as a server, accepting and executing commands for remote administrator
    - This includes intercepting keystrokes and mouse motions and sending them to attacker.
    - Also allows attacker to upload, download files





# Trojan Horses (I)


- Example 2: Huawei 5G switches
  - Public discussion about possible security risks due to Huawei 5G network components
  - Huawei's 5G networks were named a "trojan horse" by US officials in 2019 who also warned the NATO about the companies technology (CNBC 2019)
  - See Lecture 12 for more information

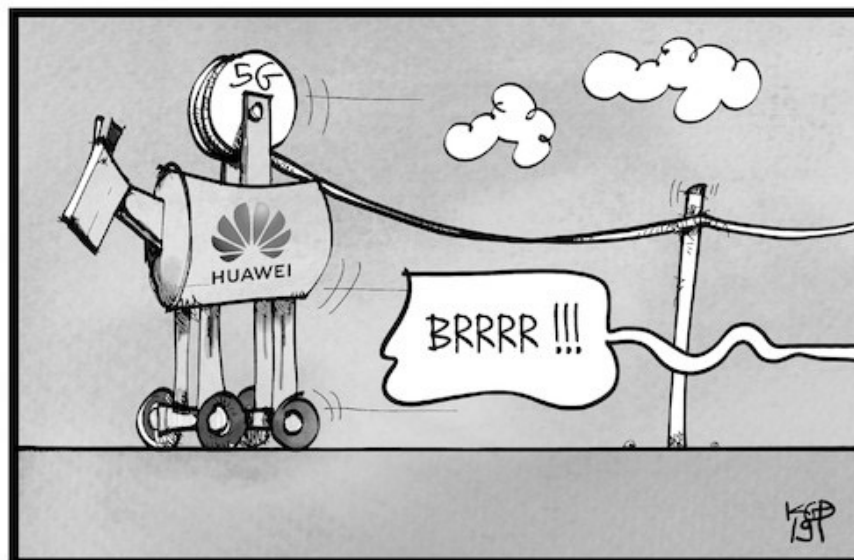

[https://de.toonpool.com/cartoons/5G-Ausbau%20mit%20Huawei\\_328821#](https://de.toonpool.com/cartoons/5G-Ausbau%20mit%20Huawei_328821#)

Program that replicates itself, e.g. by inserting itself into one or more files, and that may perform some other action, too:

- *Insertion phase*: Virus is inserting itself into a file.
- *Execution phase*: Virus is performing some (possibly null) action.

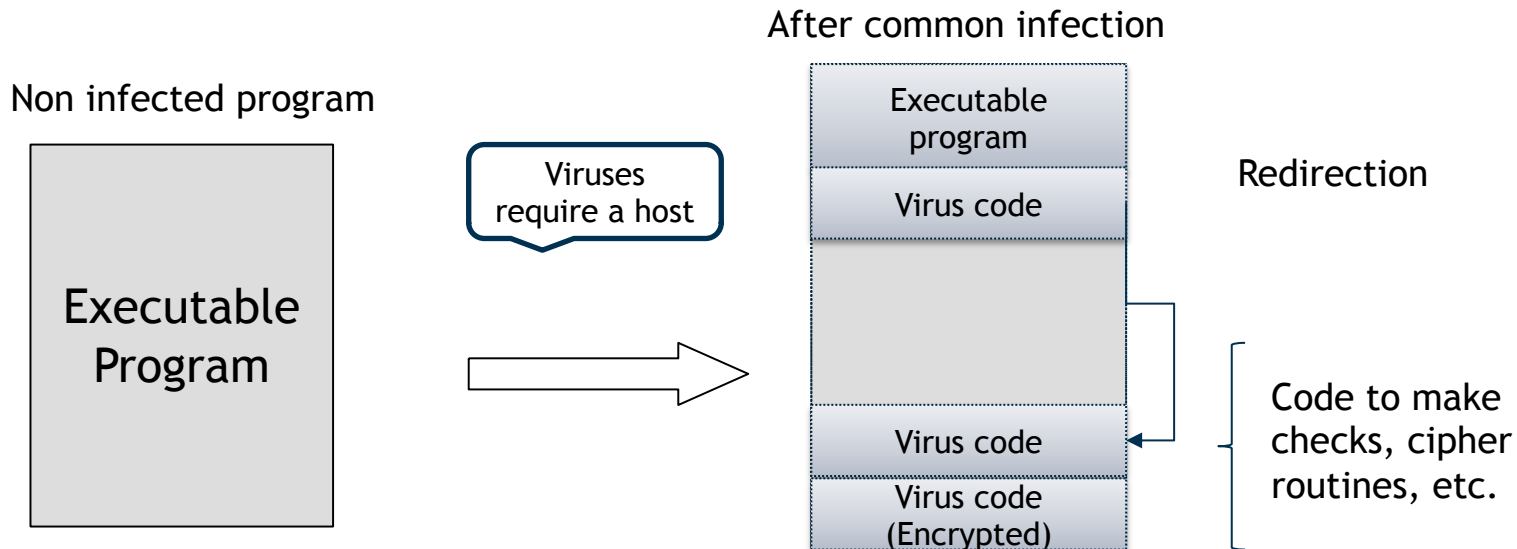

- **Boot Sector Infector**
  - Inserts itself into the boot sector of a disk
- **Executable Infector**
  - Infects executable programs, e.g. .EXE or .COM programs
  - May prepend itself (as shown) or put itself anywhere, fixing up binary so it is executed at some point
- **Multipartite Virus**
  - Can infect multiple platforms (e.g. either boot sectors or executables)
- **TSR Virus (Terminate and Stay Resident)**
  - Stays active in memory after the application is completed
- **Stealth Virus**
  - Conceals its presence on a system

- **Encrypted Virus**
  - Is enciphered except for a small deciphering routine
- **Polymorphic Virus**
  - Changes its form each time it inserts itself into another program
- **Macro Virus**
  - Composed of a sequence of instructions that are interpreted rather than executed directly
  - Can infect either executables (Duff's shell virus) or data files (Highland's Lotus 1-2-3 spreadsheet virus)
  - Independent of machine architecture
- **Retro Virus**
  - Attacks anti-virus software present on the system

- A program that copies itself from one computer to another
- Origins: distributed computations
  - Animations, broadcast messages
- Segment
  - part of program copied onto workstation
  - processes data, communicates with worm's controller
  - Any activity on workstation causes segment to shut down.

- A program that performs an action that violates the site security policy when some event occurs
- Example: program that deletes company's payroll records when one particular record is deleted
  - The “particular record” is usually that of the person writing the logic bomb.
  - If/when the person is fired and the payroll record deleted, the company loses *all* those records.

# Example – Ransomware

Malware, which


- restricts access to the computer system that it infects, and
- demands a ransom paid to the creator(s) of the malware in order for the restriction to be removed



<https://en.wikipedia.org/wiki/CryptoLocker>

## Example – ATM Attacks

- ATMs installed in non-branch areas with poor physical ATM security
- Low level of detection
- Malicious software physically install per ATM
- Approximately 2.5hrs

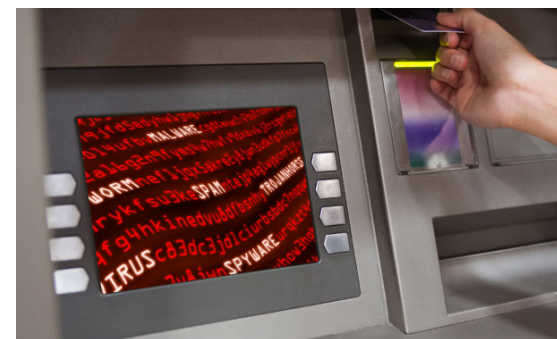

Source: [<http://www.bankinfosecurity.com/>]


Source: [SecurityIntelligence: ATM Malware: The Next Generation of ATM Attacks]



- Introduction
- Security Threats
  - Malicious Logic
  - Buffer Overflow
- Operating System Security
- Mobile Malware
- Improving Security

- Caused by failure to check input
  - Occurs when more data is put into a fixed-length buffer than the buffer can handle.
- Offers attackers the ability to write arbitrary data to memory.
  - The extra information, which has to go somewhere, can overflow into adjacent memory space, corrupting or overwriting the data held in that space.
- Persisted for decades
  - Users do not bother to install patches supplied (free) by software vendors.
- Example of vulnerability that permits remote injection of hostile code, recruiting bot nets for later DDoS attacks

# Buffer Overflow (2)

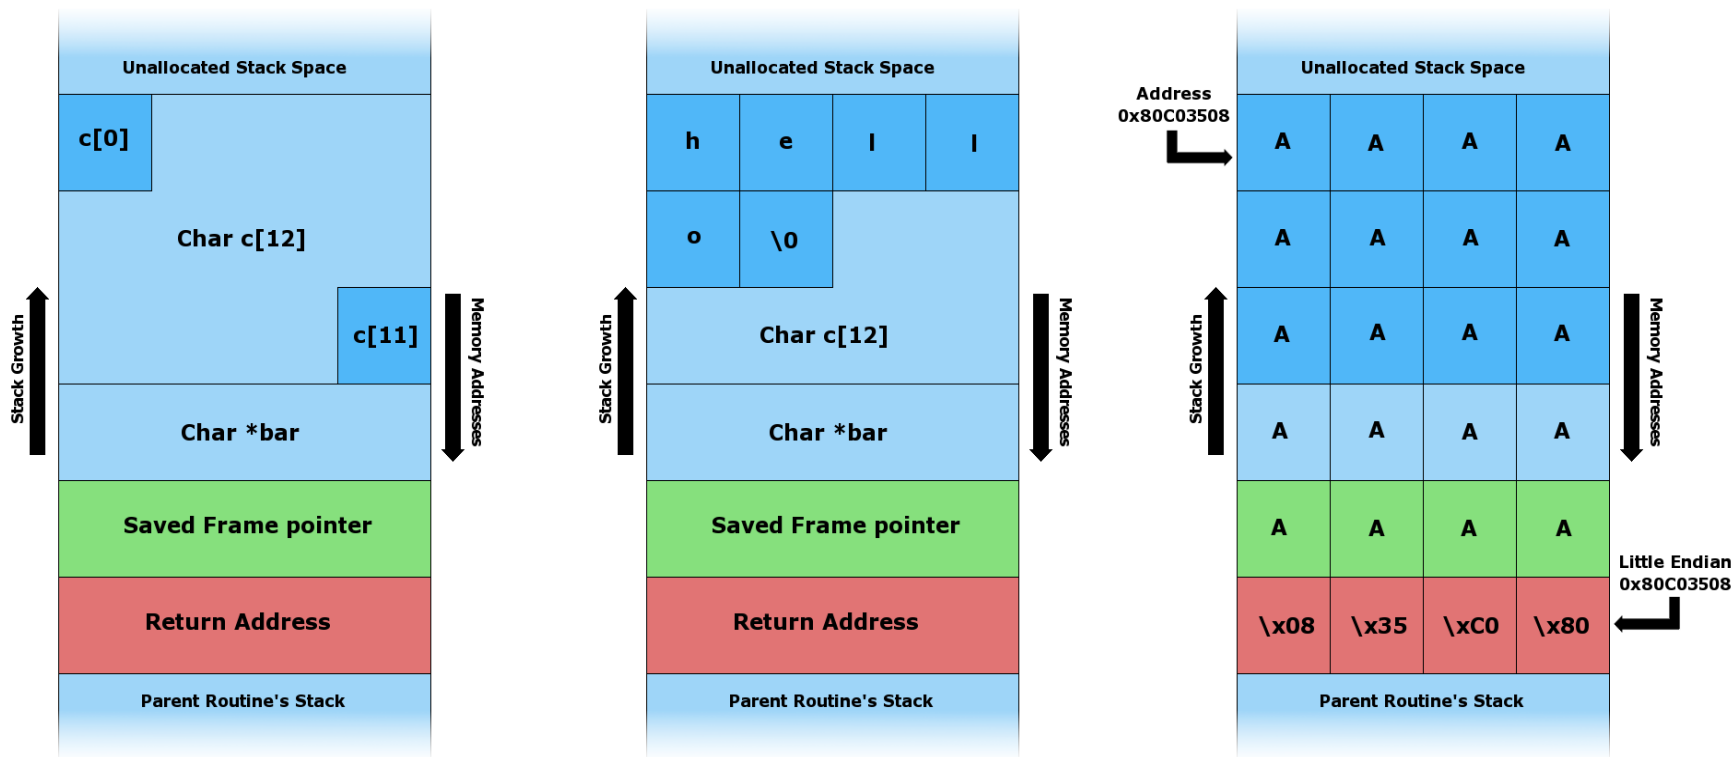


Before data is copied.

"hello" is copied.

"AAAAAAAAAAAAAAAAAAAAAA  
AA\x08\x35\xC0\x80" is  
copied.

- Introduction
- Security Threats
- Operating System Security
  - Unix
  - Windows
  - Mobile OSs
- Mobile Malware
- Improving Security

# OS Security Considerations

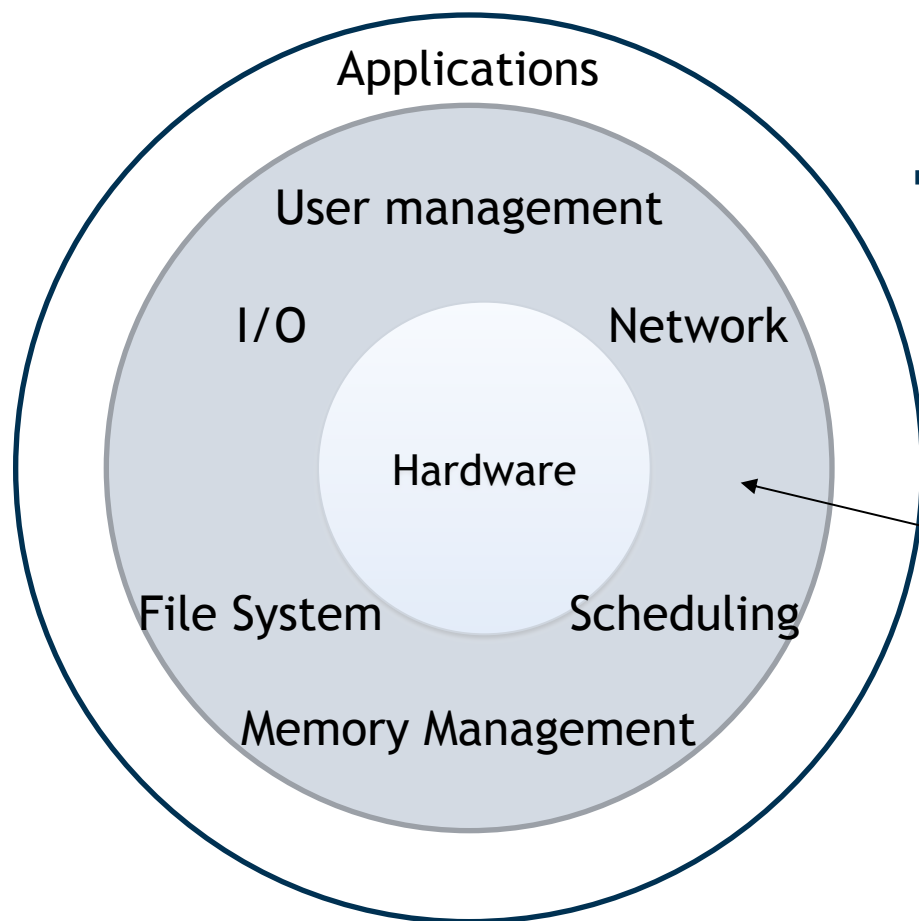

- The whole **code** which is **executed** in the **kernel** is very **security critical** (supervisor mode!) .
- It is the **target** of a lot of **attacks** to gain **root privileges** by manipulating kernel functions.

OS Kernel

- Identification
  - Recognition of human individuals
- Authentication
  - Secure confirmation of users' identifiers
- Access Control
  - Restricting usage of a service to authorized users
  - Sandboxing of apps
- Audit
  - Monitoring of system activities

- Introduction
- Security Threats
- Operating System Security
  - Unix
  - Windows
  - Mobile OSs
- Mobile Malware
- Improving Security

# Unix Security Paradigm

- In the Unix operating system there are two parts:
  - Kernel
  - User space
- Any programming code in the kernel space has full access to the computer it is running on.
- Code running in the user space has access rights based on the User ID (UID) it is running under:
  - UID 0 is reserved for the super user or root and the kernel automatically gives this UID complete access.
- Note the difference between kernel and root access:
  - Kernel processes can access anything.
  - Root processes can order the kernel to access anything.



- IDs
  - User Identification number (UID)
  - Root/super user (UID 0)
  - Group Identification number (GID)
- Authentication
  - Password: /etc/passwd
    - User name (login name)
    - Password, encrypted
      - usually modified DES (or MD5, SHA, ...)
      - One way function, it is impossible to decrypt the password.
      - At login the entered password is encrypted and compared to file.
  - User id (number)
  - Login group id (number)
  - GCOS (Comment, usually real-life name)
  - Home directory
  - Program to be executed at login, usually shell

- Access Control
  - A file has owner and group id (sometimes several).
  - A process has owner and group id (sometimes several).
  - Kernel verifies permissions before executing system calls:
    - If owner uid=0 (root), everything is allowed
    - Otherwise the uid and gid of the process and object are compared in this order and permission for the operation is searched for based on owner, group and other (world) rights
- Auditing
  - Permanent logging
  - Automatically recorded events
  - Manually set logging

- Introduction
- Security Threats
- Operating System Security
  - Unix
  - Windows
  - Mobile OSs
- Mobile Malware
- Improving Security

# Windows Security Model

- Provides security controls access and auditing
- Implements the standard subject/object security model
  - Subject - process or thread running on behalf of the system or an authenticated user
  - Object - individually secured entity such as a file, pipe, or even a process. Access control may vary between different objects.
  - Kernel mode, User mode
- Controls applied to core OS elements like processes and sockets in addition to the more traditional file system elements (NTFS).
- Problems
  - Unexpected use of extensible elements like word macros or extensible DLL's
  - Unprotected file systems
  - Attempts at backwards compatibility with older version of Windows caused some security problems (NetBIOS and FAT).

# Windows Security Elements (1)

- Identification
  - User Account
  - Security ID (SID) - A globally unique ID that refers to the subject (user or group)
- Authentication
  - Password, stored as hash value
  - Secure attention sequence CTRL+ALT+DEL
  - Security Accounts Manager

# Windows Security Elements (2)

- Access Control
  - Object - Individually secured entity such as a file, pipe, or even a process
  - Rights - actions associated between object and subject (Read, write, execute, audit)
  - Access token - the runtime credentials of the subject
  - User Access Control (UAC) - administrative privileges not available by default at all times, but only after confirmation via UAC dialog box.
  - Access control list (ACL)
    - Associated with an object
    - Ordered list
    - Each access control entry (ACE) contains a subject and a right.
    - Evaluated by the security subsystem to determine access to protected objects
    - Discretionary ACLs control access
    - System ACLs control audit

- Auditing
  - Security Reference Monitor
  - Local Security Authority
  - Event Logger
  - If auditing applies and what is to be audited is determined by the Audit Policy

- Introduction
- Security Threats
- Operating System Security
  - Unix
  - Windows
  - Mobile OSs
    - BlackBerry
    - Apple iOS
    - Android
    - Windows 10 Mobile
- Mobile Malware
- Improving Security



## Once upon a time...

- Closed platforms
- No additional software could be installed.
- Limited functionality
- E.g., Java ME: restricted access



- Open platforms
- Lots of software can be installed:
  - For different purposes
  - From different vendors
- Communication with several protocols possible:
  - GSM/GPRS, (UMTS,) LTE, 5G, ...
  - Bluetooth, Infrared, WLAN, ...
- Private and confidential data can and will be stored on the mobile device.
- Camera is usually included.




# Mobile Devices Today – Risks

- Risks of Malware
  - Viruses, Worms, Dialler, Trojan Horses, etc.
- Passwords can (and will most likely) be deactivated.
- External storage media enables potential attackers to steal private information.
- Different communication protocols can be used to attack device or steal data.
- Always connected
- Camera
  - Stealing paper based confidential information
  - Invasion of personal privacy
- Further sensors ...



# Mobile Operating Systems


Market share of leading mobile operating systems in Europe from 2010 to 2019

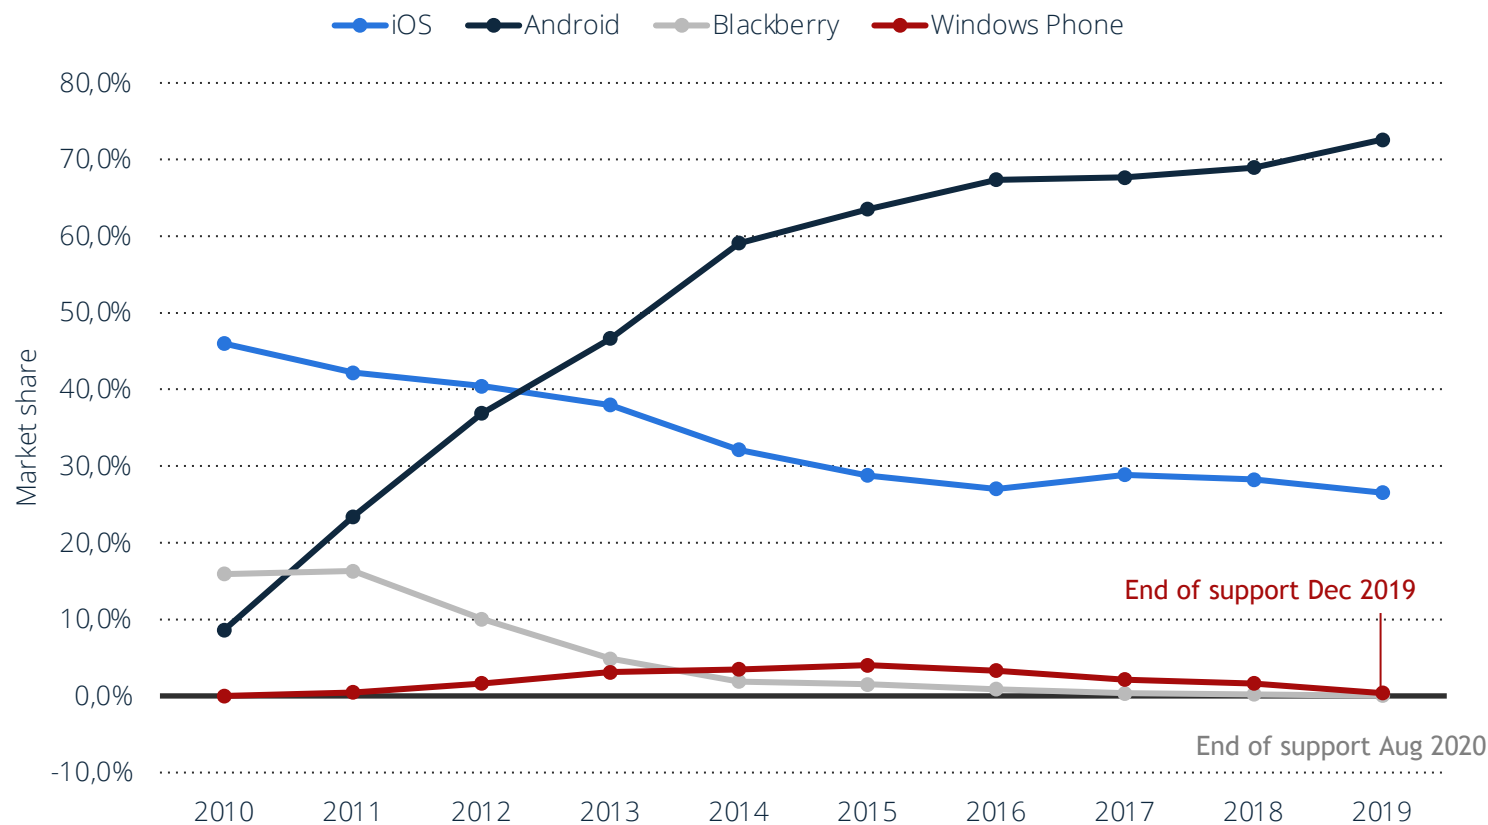

statista.com/statistics/639928/market-share-mobile-operating-systems-eu/, accessed June 2020

- BlackBerry became a big problem in some countries:
  - United Arab Emirates: BlackBerrys are a "national security risk".
  - India
  - Saudi Arabia
- (Reuters) - More than a million BlackBerry users may have key services in Saudi Arabia and the UAE cut off after authorities stepped up demands on smartphone maker Research In Motion for access to encrypted messages sent over the device.
- According to an internal note from the Indian communications ministry seen by the Economic Times in India, BlackBerry has the infrastructure for solutions that would allow agencies to track messages and monitor internet traffic, but had not provided "the architect of the solution as well as the communication path for the service" [<http://www.security-technologynews.com/news/indias-blackberry-security-concerns.html>].
- All of this does not address the security of the (proprietary) Blackberry phone platform, e.g. its operating system.

- **System security**
  - Secure boot chain
  - System Software authorization
  - iOS security APIs (located in the Core Services layer)
- **Encryption & data protection**
  - Hardware security features
  - File data protection
- **Network security**
  - Industry standard networking protocols for secure authentication and encryption of data in transmission (SSL, TLS, VPN, Single Sign-on).

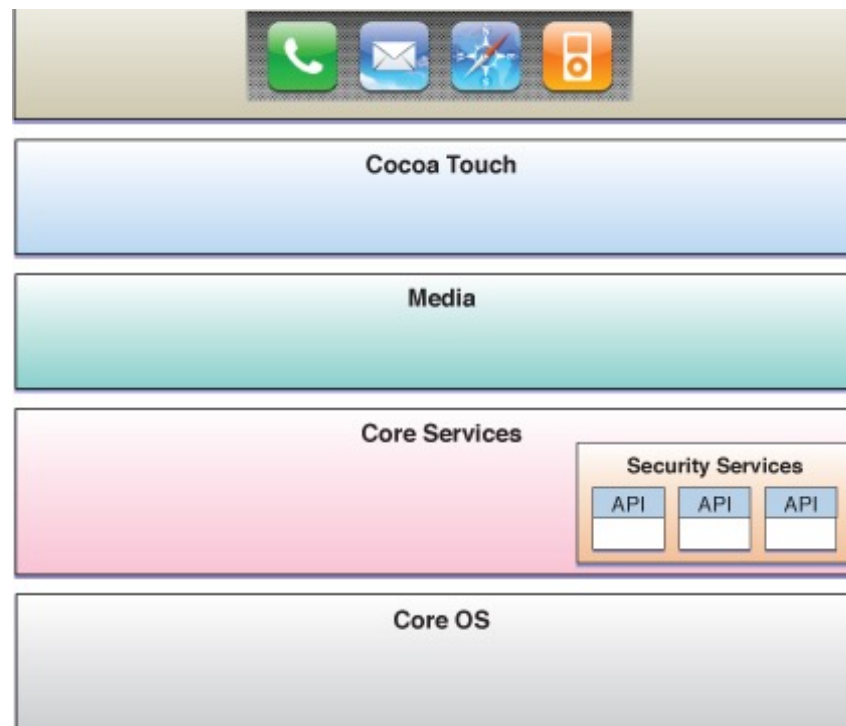


- Internet services
  - Apple's network-based infrastructure for messaging, synchronization and backup
- App security
  - App code signing by Apple
    - Prerequisite for distribution
    - Enables access to system services
  - Runtime process security
- Device controls
  - Methods that prevent unauthorized use of device and enable it to be remotely wiped if lost or stolen
  - Passcode protection

# Apple iOS Client-Side Scanning

- Apple proposed to include a child sexual abuse material (CSAM) detection system in the coming iOS15 in 2021
  - Apple devices were supposed to match images on the device against a list of known CSM image hashes (provided by the National Center for Missing and Exploited Children (NCMEC) and other child safety organisations) (ZdNet 2021)

- Initiative was silently paused after public outcry and protests about possible effects on user privacy (Register 2021)

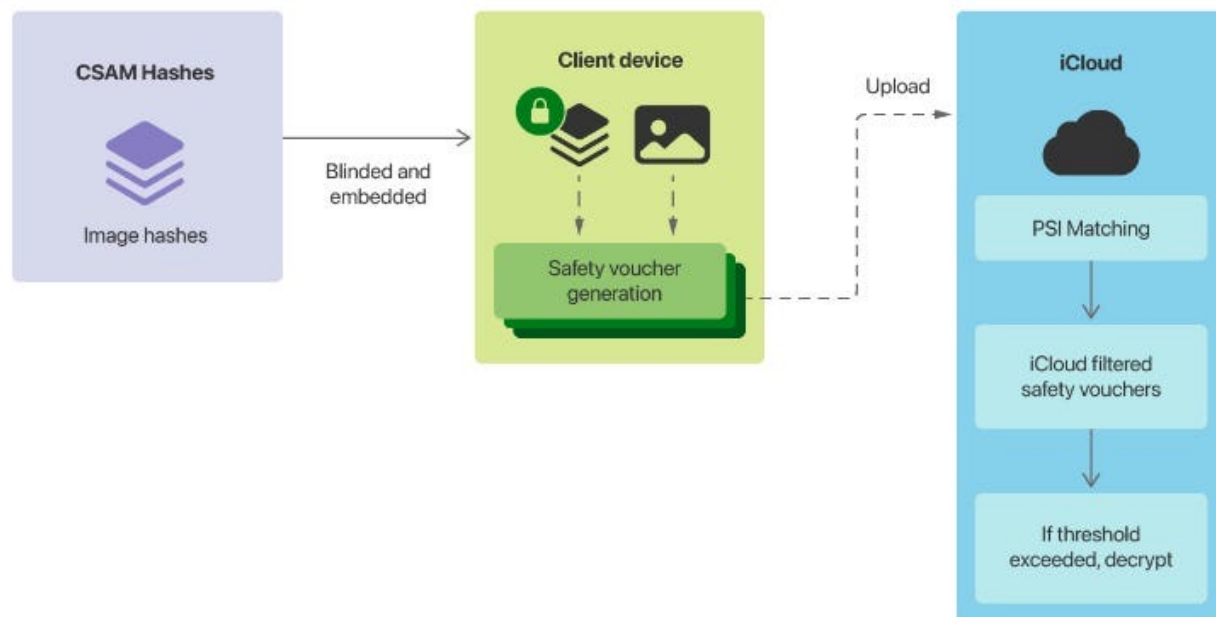



- Linux platform
  - programmed with Java
  - enhanced with security mechanisms tuned for a mobile environment
- Each application declares which permission it requires at install time.
- Android *permissions* are rights given to applications to allow them to do things like:
  - directly dialling calls (which may incur tolls),
  - disclosing the user's private data, or
  - destroying address books, email, etc.
- When installed, applications are given a unique UID, and the application will always run as that UID on that particular device.
- The UID of an application is used to protect its data and developers need to be explicit about sharing data with other applications.
- Each process is running in its own address space (Dalvik virtual machine).
- The developer signs application .apk files, and the package manager verifies them.



- Introduction
- Security Threats
- Operating System Security
- Mobile Malware
- Improving Security
  - Security Enhancing Techniques
  - Security of kernels

- From traditional desktop to mobile devices
  - New mechanisms, same purpose
    - Basic malware: very successful
    - Advanced: exploits, polymorphic code (=code mutates), botnets, crypto, ...
  - Several goals
    - Fun
    - Fame (?)
    - \$\$\$ Money \$\$\$
    - Power
    - Intelligence

- Social engineering: phishing
- Fake marketplace
- Repackaging an existing app and including the malware to generate a new infected version of the app
- Creating a legitimate app, and after a period of time when it has a huge number of downloads, the attacker release an update with the malware in it
- Executing a drive-by-download action, i.e., the app download their malicious payload after executing certain checks (e.g. is executed in a real device)
- Using malvertising to deceive users into clicking on a rogue advertisement that leads to an exploit

## Example – Mobile Malware

- Eurograbber attack
  - 36 million Euros were stolen.
  - > 30,000 victims
  - Netherlands, Spain, and Germany
  - PC and mobile targeted
  - Hijack victims' banking transactions including two-factor authentication (SMS-OTP)

[\[www.helpnetsecurity.com/2012/12/05/how-the-eurograbber-attack-stole-36-million-euros\]](http://www.helpnetsecurity.com/2012/12/05/how-the-eurograbber-attack-stole-36-million-euros)

- Introduction
- Security Threats
- Operating System Security
- Mobile Malware
- Improving Security
  - Security Enhancing Techniques
  - Security of kernels

- Introduction
- Security Threats
- Operating System Security
- Mobile Malware
- Improving Security
  - Security Enhancing Techniques
  - Security of kernels

- **Virus scanners** try to identify viruses according to a certain characteristic (virus signature) stored in a database.
- **Code Signing** helps to distinguish authorized code from other code.
- **A Trusted Operating Base** can then prohibit the execution of not authorized code e.g. viruses on a system.
- **Checksums and/or Encryption** make it possible to detect/avoid modifications done by a virus.
- **Intrusion Detection Systems (IDS)** monitor a system to detect processes which may be the result of a virus infection.
- **Heuristic virus scanners** try to identify a virus with a forecast about the runtime behaviour of code (sophisticated approach, but not really efficient).



- Introduction
- Security Threats
- Operating System Security
- Mobile Malware
- Improving Security
  - Security Enhancing Techniques
  - Security of kernels


## European Multilaterally Secure Computing Base (EMSCB)

- A trustworthy computing platform
- Employing open standards
- Solving many security problems of conventional platforms.
- Hardware functionalities provided by Trusted Computing
- Security kernel based on a microkernel
- Efficient migration of existing operating systems

emSCB

[EMSCB]


## ■ Architectural Layers

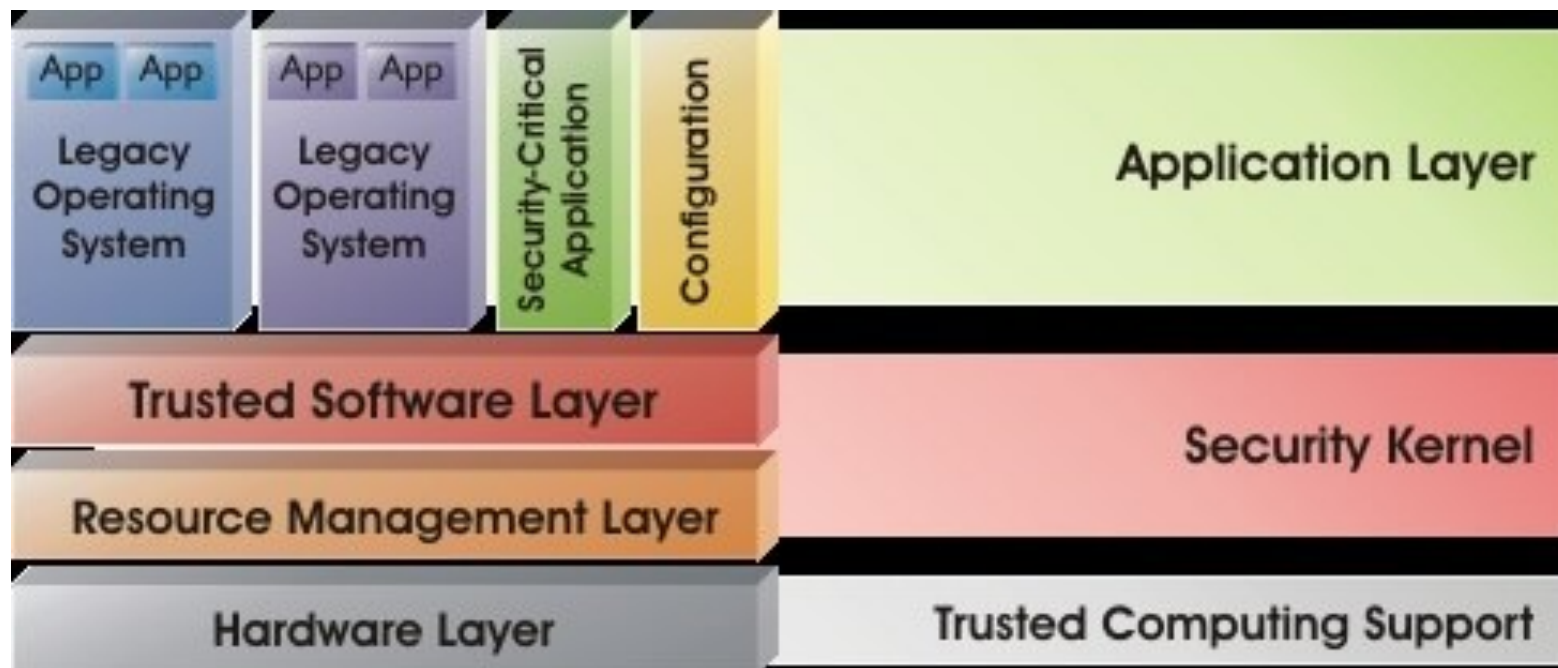


- Implementation of EMSCB architecture
- Security and access policies
- Based on PERSEUS security framework
- L4 micro kernel
- Two prototypes as proof of concept (June 2006):
  - Turaya.Crypt: Device/drive encryption, transparent for user.
  - Turaya.VPN: Secure IPSec VPN-Client compatible with conventional VPN servers.



# EMSCB: Turaya.Crypt Turaya.VPN

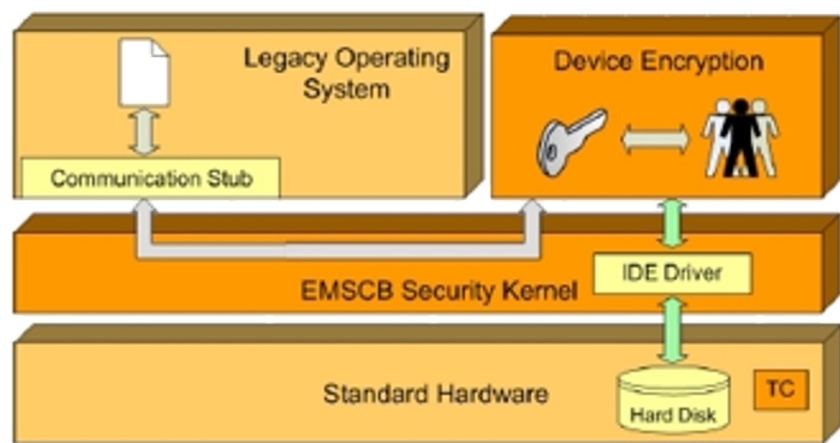

Unencrypted Communication
 Encrypted Communication

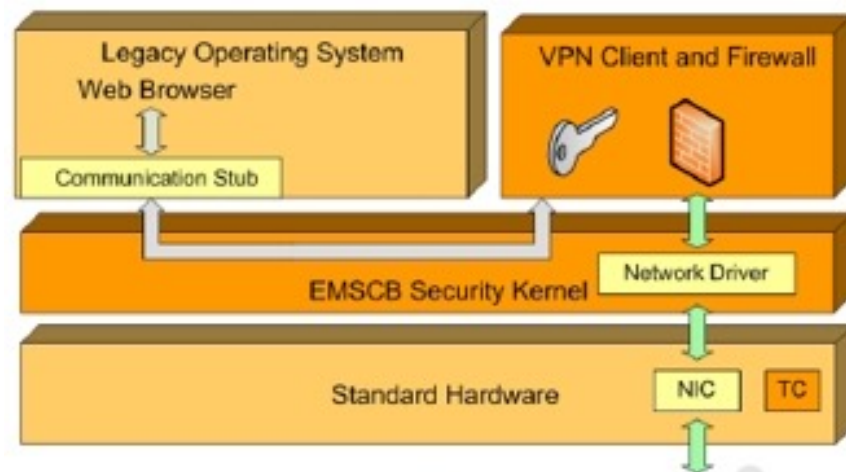

Unencrypted Communication
 Encrypted Communication

# Example: BizzTrust

- Secure usage of one smartphone for both private and corporate use
- Intuitive solution to separate data, Apps and information flows on the Android operating system.
- 2 workspaces: an open “personal” and a protected “business” workspace.
- Secure access to business resources via a secure VPN tunnel
- TrustedObjects Manager (TOM): a central place to remotely distribute
  - Firmware updates
  - Security profiles
  - Remote configuration of the devices.
- Marketed as “R&S®Trusted Mobile”

Strong Separation between  
Business and Private Data & Apps

Device Encryption

Voice Encryption

Link Encryption (VPN)

Secure Authentication

[[www.bizztrust.de](http://www.bizztrust.de), [www.sirrix.de](http://www.sirrix.de)]



- AppSec Knowledge Base <https://www.veracode.com/security/buffer-overflow>
- **Claudia Eckert:** *IT-Sicherheit*. München, Wien: Oldenbourg, 2006. pp. 37-45
- **CNBC 2019:** <https://www.cnbc.com/2019/06/28/huawei-expansion-in-western-nations-may-be-a-trojan-horse-warns-a-top-gop-senate-leader.html>
- **Dieter Gollmann:** *Computer Security*. Chichester, New York, Weinheim, Brisbane, Singapore, Toronto: John Wiley & Sons, 1999. pp. 30-54
- EMSCB -Turaya  
[www.emscb.de/content/pages/About-Turaya-de.htm](http://www.emscb.de/content/pages/About-Turaya-de.htm)
- **Evgenia Pisko, Kai Rannenberg, Heiko Rossnagel:** Trusted Computing in Mobile Platforms - Players, Usage Scenarios, and Interests; Datenschutz und Datensicherheit (DuD); 29. Jg.; H. 9, September 2005; S. 526-530  
[www.m-chair.de/staff/kai-rannenberg](http://www.m-chair.de/staff/kai-rannenberg)
- HelpNetSecurity <https://www.helpnetsecurity.com/2012/12/05/how-the-eurograbber-attack-stole-36-million-euros>
- **Intel Trusted Execution Technology**  
[www.intel.com/technology/security](http://www.intel.com/technology/security)
- iOS Security, Nov 2018, [www.apple.com/business/site/docs/iOS\\_Security\\_Guide.pdf](http://www.apple.com/business/site/docs/iOS_Security_Guide.pdf)
- **ISO/IEC 2382-8, Information Technology - Vocabulary - Part 8: Security, 1998**

- **J.P. Anderson:** “*Computer Security Technology Planning Study*,” ESD-TR-73-51, Vols I and II, NTIS AD758206, Hanscom Field, Bedford, MA (October 1972).  
<http://csrc.nist.gov/publications/history/ande72.pdf>
- **LinuxDevices.com**  
[www.linuxfordevices.com](http://www.linuxfordevices.com)
- **Matt Bishop:** *Introduction to Computer Security*. Boston: Addison Wesley, 2005. pp. 363-386.
- **Microsoft's Next-Generation Secure Computing Base**  
[www.microsoft.com/resources/ngscb/default.mspx](http://www.microsoft.com/resources/ngscb/default.mspx)
- **National Information Systems Security (INFOSEC) Glossary**, September 2000  
<http://handle.dtic.mil/100.2/ADA433929>
- **Ravi Sandhu; Xinwen Zhang.** Peer-to-Peer Access Control Architecture Using Trusted Computing Technology, SACMAT05 , Stockholm, Sweden, June 1-3, 2005,  
<http://portal.acm.org/citation.cfm?id=1064005>
- **Schreckxikon - Das A bis Z der Computer- und Datensicherheit**  
[www.sophos.de/sophos/docs/deu/papers/sophos-a-to-z-computer-and-data-security-threats.pdf](http://www.sophos.de/sophos/docs/deu/papers/sophos-a-to-z-computer-and-data-security-threats.pdf)
- **The Register 2021.**  
[https://www.theregister.com/2021/12/16/apple\\_deletes\\_csam\\_scanning\\_plan/](https://www.theregister.com/2021/12/16/apple_deletes_csam_scanning_plan/)
- **Zdnet 2021.** <https://www.zdnet.com/article/apple-child-abuse-material-scanning-in-ios-15-draws-fire/>